



National Fire Equipment Ltd.

Viper *"Spartan"* Constant Gallonage Nozzle

Versatile Lightweight Constant Flow Nozzles with New Fixed Orifice

High Quality Valve With Dual Seat & Dual Driven Shaft

Patented Rylstatic System for a Superior Fog Pattern - Maintenance Free with No Spinning Teeth to Break

Designed & Built to Meet NFPA 1964 & UNE EN 15182-1 and EN-15182-2 Type 2 Requirements



Flow Settings:

Excellent stream performance at a variety of pressures ranging from 50 PSI (3.5 bar) to 100 PSI (7 bar). Versatile, easy to use and available in four models with over 40 flow and pressure configurations to meet any demand. The FLUSH mode is used to ensure that any debris is flushed from the nozzle to avoid pattern disruptions or flow reductions.

Stream Pattern:

The nozzle stream is adjusted by rotating the bumper giving the firefighter the widest fog pattern (Full Fog – Protection) to the narrowest fog pattern (Narrow Fog and Straight Stream). The bumper has a raised lug to identify the Narrow Fog in low visibility conditions. The VIPER® Spartan series comes standard with the innovative patented fog pattern called RYLSTATIC®. RYLSTATIC® is a system that gives you a uniform water fog with smaller water droplets and less friction loss than other traditional systems. VIPER® Spartan nozzles have been designed to offer a broader fog shield of protection to the firefighters.

Shut Off Valve:

The valve has a dual seat and dual driven shaft to offer better performance against water hammers and to enhance its durability. The valve itself is a low maintenance product with a stainless steel ball valve operated through an OPEN/CLOSE handle. The operation is smooth and constant allowing firefighters to open and close the valve easily.

Stainless Steel Inlet Screen:

A stainless steel screen is mounted within the inlet to prevent materials from entering the nozzle, which reduces the risk of damage or failure during operation.

Ring Markings:

Markings on the flow selector ring and the pattern ring are laser engraved onto anodized aluminum that are easy to read and will not fade.





National Fire Equipment Ltd.

Viper "Spartan" Constant Gallonage Nozzle

Lot Number:

Every nozzle is marked with a lot number before leaving the factory. This number can be used for traceability purposes.

Foam:

The VIPER® Spartan nozzle can be used as a foam nozzle with the addition of the optional foam tube. The nozzle works well with pre-mixed solutions or with inline eductors.

Inlet Options:

The VIPER Spartan® constant flow nozzles are available with the following standard threads:

- NST/NH Female
- NPSH/IPT Female
- BSP Female

The VIPER® Spartan nozzles are available upon request with the following couplings: STORZ, BARCELONA UNE 23400, DSP/GUILLEMIN, UNI, NOR and GOST.


The swivel inlet allows the nozzle to rotate continuously while connected to the supply hose.

Approvals and Standards :

The VIPER® Spartan nozzle complies with NFPA 1964 and is manufactured in an ISO9001 accredited facility. EN15182-1 & EN15182-2 type 2 Self-certificate available by request.

Service and Maintenance:

The VIPER® Spartan nozzle requires minimal maintenance during operation provided the unit is regularly flushed with clean water after being used with foam or contaminated water. Service kits are also available.

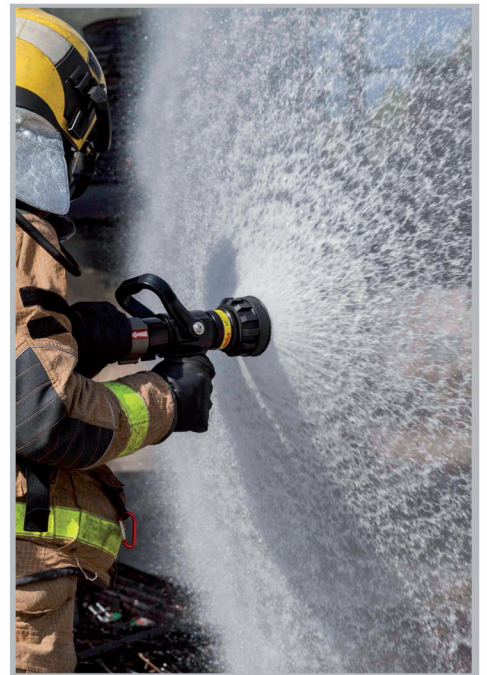

National Fire Equipment Ltd. reserves the right to modify any specification without prior notice to meet or exceed changing standards. Special construction characteristics can be produced upon special request.



Innovative Fog Technology

The innovative RYLSTATIC® System is a patented technology



National Fire Equipment Ltd.

TORONTO: (905) 761-6355
Toll Free: (800) 267-8508

OTTAWA: (613) 723-6071

VANCOUVER: (604) 420-1131
Toll Free: (800)-667-2138

BURNABY: (604)-299-4498

EDMONTON: (780) 455-3870
Toll Free: (888)-891-1008

CALGARY: (403) 236-5661

MONCTON: (506) 859-7277
Toll Free: (877) 816-3473


MISSISSAUGA: (905) 565-1385


www.nationalfire.com




National Fire Equipment Ltd.

Viper "Spartan" Constant Gallonage Nozzle

1" Viper [™] Spartan	Nozzle Model	Length		Weight		Swivel Inlet	Nozzle Flow				Effective Reach*		Attach. Foam Tube		
		cm	inch	kg	lbs		50 psi	75 psi	6 bar	100 psi	m	ft			
							gpm	gpm	lpm	gpm					
	VS 25	20.6	8.11	1.23	2.72	1" standard or 1 1/2" optional					19	5	16	52	CEP VA 1"
											50	15	20	66	
											150	30	23	75	
											250	60	27	89	

1 1/2" Viper [™] Spartan	Nozzle Model	Length		Weight		Swivel Inlet	Nozzle Flow				Effective Reach*		Attach. Foam Tube				
		cm	inch	kg	lbs		50 psi	75 psi	6 bar	100 psi	m	ft					
							gpm	gpm	lpm	gpm							
	VS 95	21.7	8.54	1.60	3.53	1 1/2" female standard or 2" BSP optional					60	60	250	60	27	89	CEP VA 1 1/2"
											75	75	360	75	29	95	
											95	95	400	95	33	108	
											125	500	125	37	121		
	VS 150	25.3	9.96	2.25	4.96	1 1/2" female standard or 2" BSP optional					95	95			32	105	
											125	125	500	125	37	121	
											150	150	550	150	38	125	
											175	650	175	38	126		
						750	200	39	128								

2 1/2" Viper [™] Spartan	Nozzle Model	Length		Weight		Swivel Inlet	Nozzle Flow				Effective Reach*		Attach. Foam Tube
		cm	inch	kg	lbs		50 psi	75 psi	6 bar	100 psi	m	ft	
							gpm	gpm	lpm	gpm			
	VS 250	33.6	13.23	3.42	7.54	2 1/2" female	250	250	950	250	41	135	-

* The Effective Reach has been measured at 6 bar (85 psi).
 The RYLSTATIC® System is a low maintenance system.