


NFE MODEL 25G 2 1/2" GROOVED ANGLE HOSE VALVE



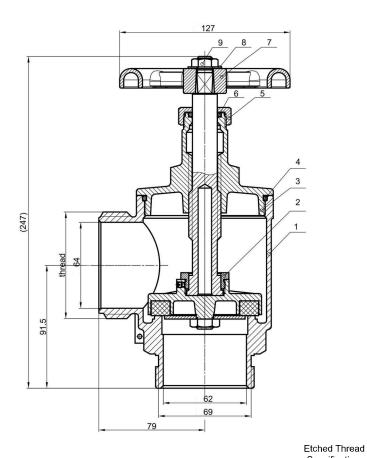

Specifications Laser Height of letter : 4mm

Part No.	Thread	Surface Treatment	Laser
25BB-G	BCT3.000X8	Brass	ВСТ
25CB-G	CSA3.125X5	Brass	CSA
25QB-G	QST3.031X7	Brass	QST

Available special order - Satin or polished chrome


5	Lock Nut	C37700			
4	0-Ring	EPDM(A70)	9	Wheel Nut	C37700
3	Botten	C37700	8	Wheel Washer	304
2	Spool Assembly	Sub Assembly	7	Handle Wheel	ZL102
1	Body	C37700	6	0-Ring	EPDM(A70)
ITEM	DESCRIPTION	MATERIAL	ITEM	DESCRIPTION	MATERIAL






Certificate No.: 20140110-EX16364

Approval Id: 0003049539







VANCOUVER (604) 420-1131 Toll Free: (800) 667-2138

OTTAWA (613) 723-6071 www.nationalfire.com


CALGARY (403) 236-5661

EDMONTON (780) 455-3870 Toll Free: (888) 891-1008

MONCTON (506) 859-7277 Toll Free: (877) 816-3473



NFE MODEL 25 2 1/2" THREADED ANGLE HOSE VALVE

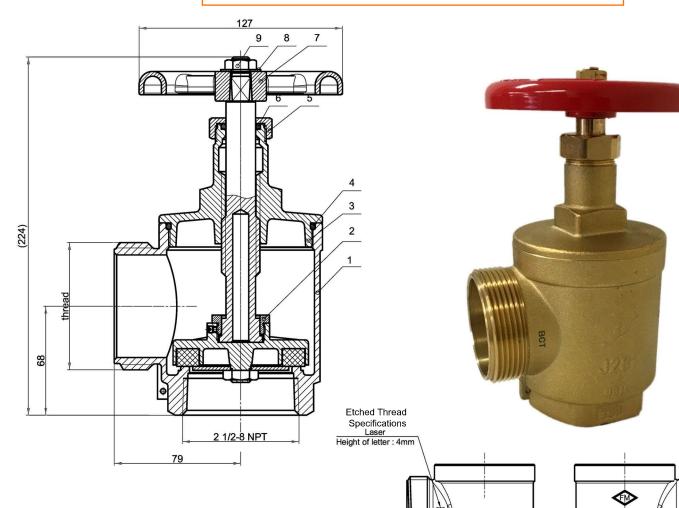

Part No.	Thread	Surface Treatment	Laser
25BB	BCT3.000X8	brass	ВСТ
25BC	BCT3.000X8	satin chrome plating	
25CB	CSA3.125X5	brass	
25CC CSA3.125X5		satin chrome plating	CSA
25CPC	CSA3.125X5	polished chrome plating	
25MB	Moncton2.962X8	brass	MT
25NFB	NFLD3.250X5	brass	NFLD
25NFC	NFLD3.250X5	satin chrome plating	
25NSB	NSST3.230X5	brass	NSST
25QB	GQB QST3.031X7 brass		QST
25QC	QST3.031X7	satin chrome plating	ų si
25WB	WCT3.250X6 brass		WCT
25WC WCT3.250X6		satin chrome plating	

FM APPROVED & ULULC LISTED FOR 175 PSI


PRESSURE RATED FOR 300 PSI

HOSE VALVE 2.5"



Certificate No.: 20140110-EX16364

Approval Id: 0003049539



J281

300

AMA and other hose threads are available. Contact customer service for more information.



TORONTO HEAD OFFICE (905) 761-6355 Toll Free: (800) 267-8508 VANCOUVER (604) 420-1131 Toll Free: (800) 667-2138

OTTAWA (613) 723-6071 www.nationalfire.com EDMONTON (780) 455-3870 Toll Free: (888) 891-1008 CALGARY (403) 236-5661 MONCTON (506) 859-7277 Toll Free: (877) 816-3473 MISSISSAUGA (905) 565-1385